


USER MANUAL of Analogue Phone

Emergency Telephone
HQYTCS10

Connection

Connect the telephone to your system.

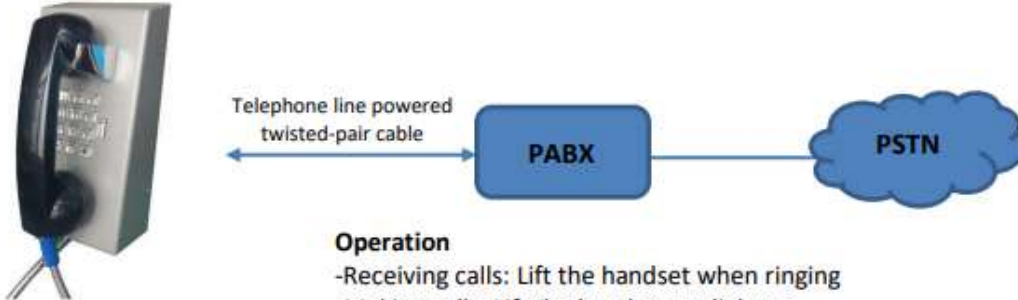

Operation

- Receiving calls: Lift the handset when ringing
- Making calls: Lift the handset to dial out
- Ending calls: Handset On-hook

Advance programming

Setup by local keypad or by phone calls when the call gets through. Note: All the commands as below table. Settings must begin with programming password.

*#9999#205#	
*#	Start programming
9999	Programming password
#	Separator
20	Program parameter (Program max call time)
5	Data value (Max call time 5mins)
#	Separator


Code	Description	Default
00?#	Change programming password, where ? = 4 digits	9999
000#	Reset programming password to default 9999	N/A
20?#	Max call time, where ? = 0-255 mins, 0=no limit	0
999#	Restore factory settings	N/A

Hear DTMF tone twice "Di Di" for valid operation; Silence means invalid operation.

Additional programming options:

Code	Description	Default
*#9999#31?#	Setting flash time (when you press "R" button), where ? = 100-900 MS	600 MS
*#9999#71?#	Setting up to dial the specified number every few days, where ? = 1-9	N/A
*#9999#72?#	Setting the number to call every few days, where ? = 3-16 digits	N/A
*#9999#73?#	Setting the duration of calls made every few days, where ? = 0-99 seconds, to make sure the number you set up is online	20s

Installation

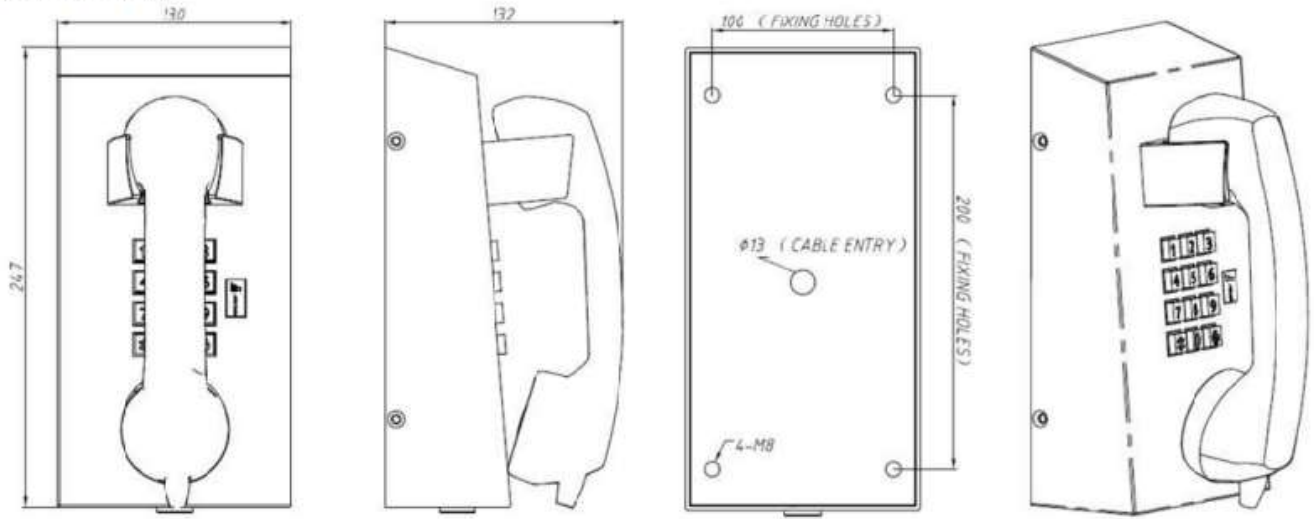

Packing

Unit size: 247*130*132(mm); Net weight: 3.5 KG

Carton size: 340*235*165(mm); Net weight: 3.5 KG; Gross weight: 4KG

Packaging materials: pearl cotton, carton

For additional support, please contact us at <https://www.HQTelecom.com>