

Vandal-Resistant Stainless-steel Wall-mount Auto-dial or No-dial Phone



Model: HQ-JWAT135

This stainless-steel phone with no Dialpad can be used in a variety of applications that require a strong and compact phone with the ability to be able to receive incoming calls such as in pools, hospitals, schools, airports, condo gates, entryways, courtesy, emergency, waiting rooms etc.

FEATURES:

- Compatible with analog landlines and VOIP.
- Built with 304 stainless steel material shell, high mechanical strength and strong impact resistance.
- Vandal proof handset with internal steel lanyard and grommet provides added security for handset cord.
- [Option 1 – Pre-programmed Auto Dial Number / No auto-dial – Receive calls only] – If you choose the auto-dial option, we will program your phone at the factory to auto dial a phone number (changing this auto dial number requires an external keypad – sold separately).

IMPORTANT: If you choose the pre-programmed auto-dial number option, please contact us after completing your order to let us know your order # and the phone number you wish for us to program on your phone(s) at the factory.

- [Option 2 – Built-in Speaker Holes / Solid - No Speaker holes] A built-in speaker holes in recommended to be able to hear the ringing of incoming calls from at a greater distance (~100 feet). Without these holes, you will need to be within 10-15 feet of the phone to be able to hear the ringing of incoming calls.


Note: Having speaker holes may result in a decrease the weatherproof rating. If this is a concern, we recommend our HQ-JWAT304 or HQ-JWAT306 models).

- Zinc alloy keypad.
- Magnetic hook switch with reed switch.
- Noise-canceling microphone.
- Easy to install wall mount enclosure style.
- Weatherproof protection IP54.
- Phone line powered (RJ11 plug with patch cable included).
- FCC, CE, RoHS, ISO9001 compliant.
- Two (2) years warranty.

Technical Parameters

Power Supply	Telephone Line Powered
Voltage	DC48V
Standby Work Current	≤1mA
Frequency Response	250~3000 Hz
Ringer Volume	≤80dB(A)
Corrosion Grade	WF1
Ambient Temperature	-40~+70℃
Atmospheric Pressure	80~110KPa
Relative Humidity	≤95%
Anti-vandalism Level	IK10
Installation	Wall-mounted

Product Dimensions

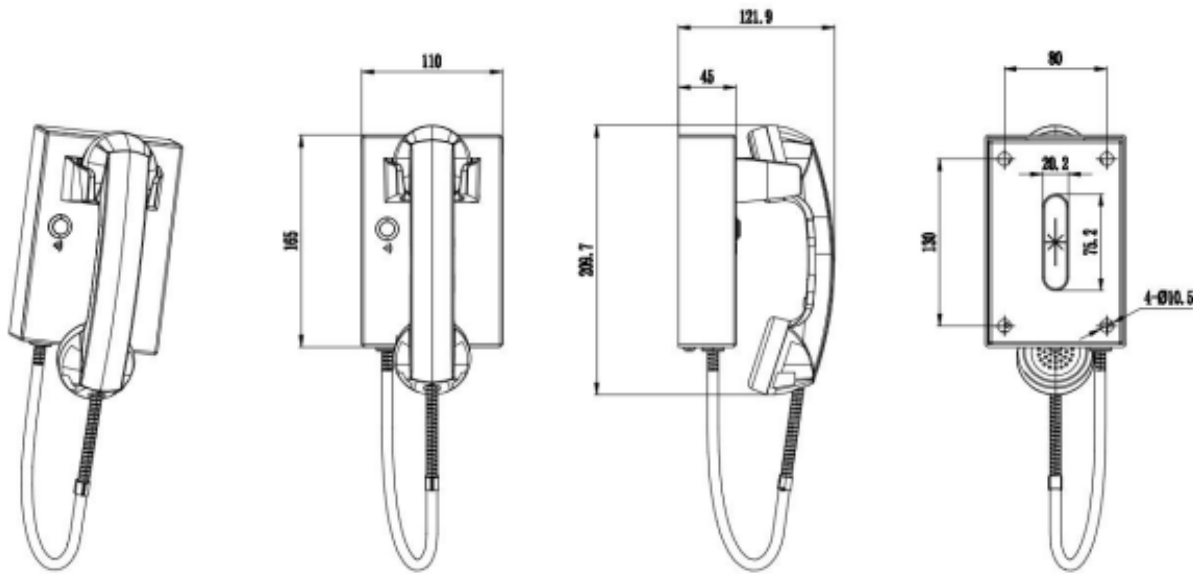

Package

Unit size: 165*110*45 (mm)

Carton size: 530*350*350 (mm)

Packaging materials: Pearl cotton, Carton

Net weight: 1.7 KG

Gross weight: 2 KG



For service and support, please visit our website at <https://www.hqtelecom.com>.