


HOT Dialer / OFF-HOOK Dialer Programming Instructions

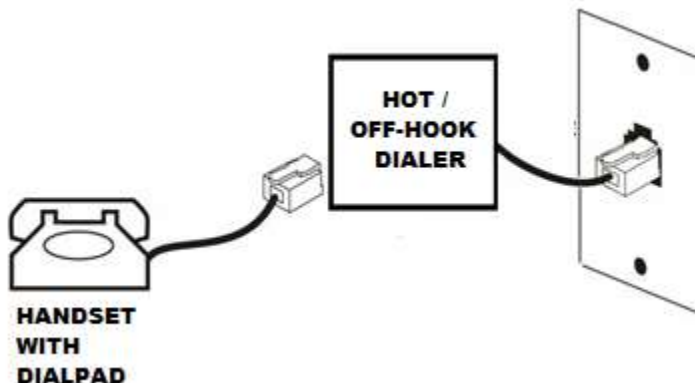

Programming the HOT / OFF-HOOK Dialer:

Preparation:

- 1) You need a regular handset with **dial-pad** connected to the HOT / OFF-HOOK Dialer in order program the dialer on your NO DIAL phone. Then, follow the steps below.
- 2) You also need to plug in the other side of the HOT / OFF-HOOK Dialer to a phone line with dialtone (DTMF or FSK compatible)

- Step 1) Lift off the handset and enter **# 0 *** (you should hear a 'Beep' sound)) to enter the programming mode
- Step 2) Enter **01** (you should hear a 'Beep' sound) -- entering function code to auto dial a number)
- Step 3) Enter **XXX-XXX-XXXX** (any number (0-9) including * from 1 up to 20 digits in length. This number will be dialed automatically every time you take the handset off hook)
- Step 4) Hang-up or press **##** -- exit

Now your HOT / OFF-HOOK Dialer is programmed to auto dial your number. You can unplug it and it will retain the programmed number.

To reset the Call Restrictor, follow these steps:

- Step 1) Enter **# 0 *** (you should hear a 'Beep' sound) -- entering the programming mode
- Step 2) Enter **88** (you should hear a 'Beep' sound) -- reset code
- Step 3) Enter **##** (exit)

Please visit hgtelecom.com for additional support on this product.