


Auto Dial Emergency Telephone HQYT14-A

Connection

Connect the telephone to your system.

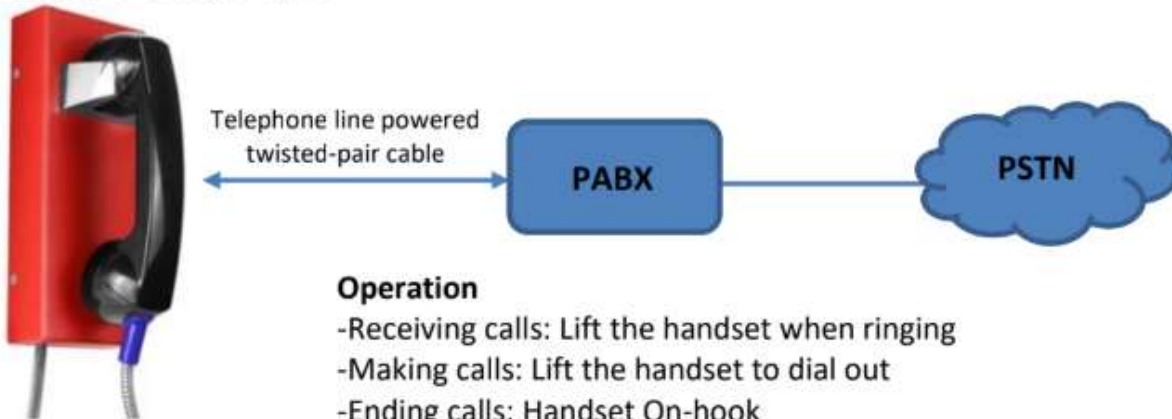

Operation

- Receiving calls: Lift the handset when ringing
- Making calls: Lift the handset to dial out
- Ending calls: Handset On-hook

Advance programming


Setup by local keypad or by phone calls when the call gets through. Note: All the commands as below table. Settings must begin with programming password.

*#9999#11911#	
*#	Start programming
9999	Programming password
#	Separator
11	Program parameter (Program speed dial number)
911	Data value (Speed dial number 911)
#	Separator

Code	Description	Default
00?#	Change programming password, where ? = 4 digits	9999
000#	Reset programming password to default 9999	N/A
11X#	Program a speed dial number. Where X=3-14 digits	N/A
11#	Delete a speed dial number	N/A
20?#	Max call time, where ? = 0-255 mins, 0=no limit	0
999#	Restore factory settings	N/A

You will hear DTMF tone twice "Di Di" for valid operation; Silence means invalid operation.

Installation

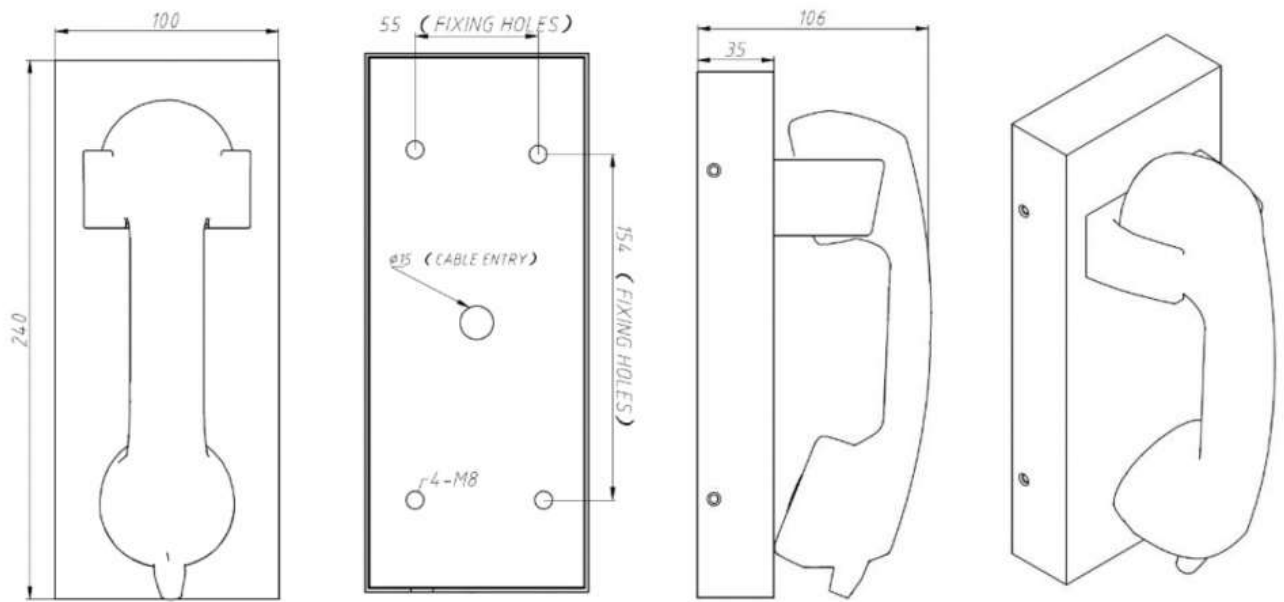

Packing

Unit size: 240*100*106mm); Net weight: 1.6KG

Carton size:340 *240 *160(mm); Net weight: 1.6KG; Gross weight: 2.2KG

For additional support, please contact us at <https://www.HQTelecom.com>